


LHR SERIES-HIGH RATE

LHR12300W (12V300W)

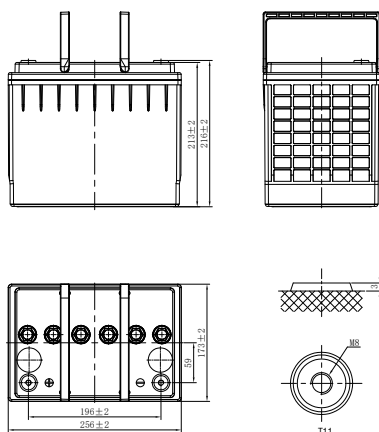

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Rate (25°C)	W ₁₅ , 1.67V/cell	300W/cell
Nominal Capacity (25°C)	C ₁₀ , 1.80V/cell	75Ah
Dimension	Length	256mm (10.1inches)
	Width	173mm (6.81inches)
	Container Height	213mm (8.39inches)
	Total Height	216mm (8.50inches)
Approx Weight	23.7kg (52.2lbs)	
Terminal	T11(M8)	
Container Material	ABS (UL94 HB or V-0 optional)	
Short-circuit current	1875A	
Internal Resistance (25°C)	Approx 5 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-20~55°C (-4~131°F)
	Charge	-20~40°C (-4~104°F)
	Storage	-15~50°C (5~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.25C	
Charge voltage (25°C)	Standby Use	Equalization Use
	2.25~2.30V/cell	2.30~2.40V/cell
Temp. Coefficient	-3mV/cell/°C	-4mV/cell/°C
	40°C (104°F)	106%
Effect of temp. to Capacity	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	≤3% per month at 25°C (77°F)	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	177.6	145.4	133.5	102.3	73.5	51.6	39.4	27.1	21.7	18.2	14.4	12.6	8.35	7.22
1.80V/cell	195.4	158.2	139.8	113.9	78.6	54.5	41.6	28.7	22.9	19.0	15.2	12.9	8.72	7.50
1.75V/cell	213.1	171.0	150.0	115.3	80.3	55.9	42.7	29.4	23.5	19.5	15.5	13.1	8.90	7.63
1.70V/cell	230.9	183.8	154.8	117.6	81.8	56.7	43.3	29.8	23.8	19.7	15.6	13.2	8.99	7.70
1.67V/cell	252.2	195.8	159.6	119.9	82.0	57.1	43.6	30.0	24.0	19.8	15.7	13.2	9.02	7.74
1.60V/cell	257.5	200.1	162.1	123.2	83.3	57.7	44.1	30.3	24.3	20.0	15.8	13.3	9.09	7.80
Constant Power Discharge (Watts/cell) at 25°C (77°F)														
F.V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h
1.85V/cell	333.9	273.3	251.0	192.3	138.2	105.4	80.5	55.4	44.3	37.2	29.5	25.7	17.1	14.8
1.80V/cell	367.3	297.4	262.8	214.1	147.8	111.5	85.1	58.6	46.9	38.9	31.1	26.5	17.8	15.3
1.75V/cell	400.7	321.5	281.9	216.8	151.0	114.3	87.2	60.0	48.0	39.8	31.6	26.8	18.2	15.6
1.70V/cell	434.1	345.6	291.0	221.1	153.8	115.9	88.5	60.9	48.7	40.4	31.9	27.0	18.4	15.7
1.67V/cell	474.1	368.1	300.0	225.4	154.2	116.7	89.1	61.3	49.0	40.6	32.1	27.1	18.4	15.8
1.60V/cell	484.2	376.2	304.7	231.6	156.6	118.0	90.1	62.0	49.6	40.9	32.3	27.2	18.6	15.9

LHR SERIES-HIGH RATE

LHR12300W (12V300W)



APPLICATIONS

- UPS
- Hospitals and Testing Laboratories
- Emergency Power Supply
- Industrial Process Control Facilities
- Banks and Financial Markets
- Data and Network Operation Centers


GENERAL FEATURES

- 12 years design life (25°C)
- Excellent high current performance - optimised for short discharge time
- Advanced AGM technology for superior high-rate power
- Long Life Alloy - minimizing grid growth, reducing gassing, and extending battery life
- Epoxy-sealed posts eliminate leaks
- Optimal energy density - saves floor space


STANDARDS

- Compliance with IEC 60896 standards
- Classified as "Long Life" according to Eurobat
- CE,UL Approved
- Manufactured in Leoch® IATF 16949, ISO 45001, ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

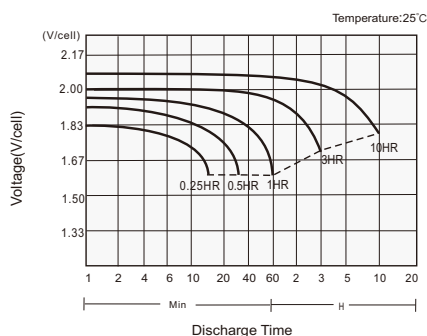


Charging Characteristics

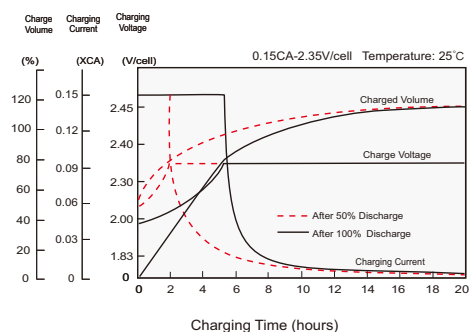

Effects of Temperature on Capacity

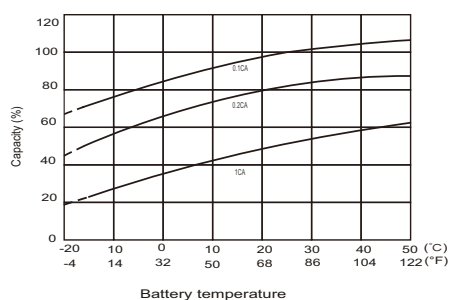

Self Discharge Characteristics

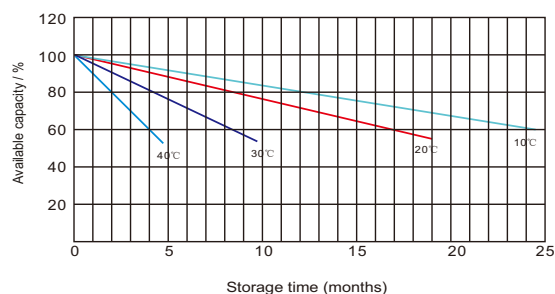

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
 © LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.: LB-LHR12300W-PD-EN-V2.0-20231228