


PLX-PURE LEAD HIGH RATE

PLX12-260FT(A) (12V260W)

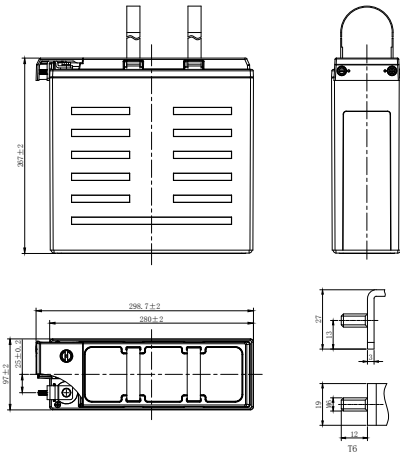

CHARACTERISTICS

Item	Specifications	
Rated Voltage	12V	
Nominal Rate (25°C)	$W_{15}, 1.67V/cell$	260W/cell
Nominal Capacity (25°C)	$C_{10}, 1.80V/cell$	62Ah
Dimension	Length	298.7mm (11.8inches)
	Width	97mm (3.82inches)
	Container Height	267mm (10.5inches)
	Total Height	267mm (10.5inches)
Approx Weight	19.5kg (43.0lbs)	
Terminal	T6(M6)	
Container Material	PC-ABS (UL94 V-0)	
Short-circuit current	1364A	
Internal Resistance (25°C)	Approx 5.4 mΩ (Fully charged)	
Operating Temp. Range	Discharge	-40~65°C (-40~149°F)
	Charge	-20~54°C (-4~129°F)
	Storage	-20~50°C (-4~122°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Max.Charging Current (25°C)	0.3C	
Charge voltage (25°C)	Standby Use	Equalization Use
	2.27±0.02V/cell	2.35-2.40V/cell
Temp. Coefficient	-3mV/cell/°C	
	-4mV/cell/°C	
Effect of temp. to Capacity	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	PLX series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the timeinterval will be shorter.Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.	

DISCHARGE TABLE

Constant Current Discharge (Amperes) at 25°C (77°F)															
F./V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	173.0	124.5	106.1	86.5	66.2	49.2	38.6	29.3	24.6	17.4	13.4	10.5	7.45	6.08	3.22
1.80V/cell	202.9	142.6	117.5	94.5	70.2	51.0	40.3	30.0	24.9	17.5	13.5	10.9	7.62	6.20	3.29
1.75V/cell	226.9	155.6	126.9	100.8	74.7	53.2	41.8	30.7	25.2	17.6	13.6	11.1	7.79	6.29	3.33
1.70V/cell	247.4	167.8	134.7	106.0	77.5	55.1	42.9	31.2	25.4	17.7	13.7	11.2	7.83	6.30	3.36
1.67V/cell	265.8	176.5	141.9	110.1	80.6	56.9	44.0	31.7	25.6	17.8	13.7	11.3	7.94	6.44	3.39
1.60V/cell	282.4	186.8	149.0	115.0	82.6	58.1	44.8	32.1	25.7	17.9	13.8	11.4	8.04	6.48	3.50
Constant Power Discharge (Watts/cell) at 25°C (77°F)															
F./V/Time	5min	10min	15min	20min	30min	45min	1h	1.5h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	324.2	239.0	205.9	168.3	128.9	97.2	76.6	58.3	49.1	34.9	26.9	21.2	15.1	12.4	6.58
1.80V/cell	376.1	271.0	226.7	182.7	136.7	100.3	79.4	59.4	49.4	34.9	27.1	21.9	15.4	12.6	6.70
1.75V/cell	415.3	292.3	242.2	193.2	144.2	103.8	81.8	60.5	49.8	35.1	27.2	22.3	15.6	12.7	6.75
1.70V/cell	448.8	311.2	254.5	201.2	148.4	106.8	83.4	61.1	50.0	35.2	27.3	22.4	15.8	12.7	6.82
1.67V/cell	451.9	323.0	260.0	206.8	155.0	109.7	85.2	61.9	50.2	35.1	27.2	22.5	15.9	12.9	6.86
1.60V/cell	465.9	336.9	266.5	213.6	159.1	110.9	86.0	62.1	50.2	35.1	27.2	22.6	16.0	13.0	7.07

PLX-PURE LEAD HIGH RATE

PLX12-260FT(A) (12V260W)



APPLICATIONS

- UPS
- Emergency lighting
- Emergency Power supply
- Electric starting
- Power tools


GENERAL FEATURES

- 15 years design life (25°C)
- Utilizes TPPL technology, thin positive grids and unique manufacturing process to maximize corrosion resistance and service life while increasing energy density
- Specifically designed for high-rate discharge applications
- Wide Wpc range of front and top terminal monoblocs
- UL 94 V-0 Case and cover heat sealed and 100% tested to prevent leaks


STANDARDS

- Compliance with IEC 60896 standards
- Classified as "Very Long Life" according to Eurobat
- CE,UL Approved
- Manufactured in Leoch@IATF 16949, ISO 45001,ISO 9001 and ISO 14001 certified production facilities


Discharge Characteristics

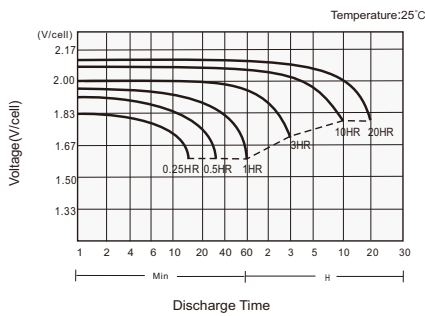


Charging Characteristics

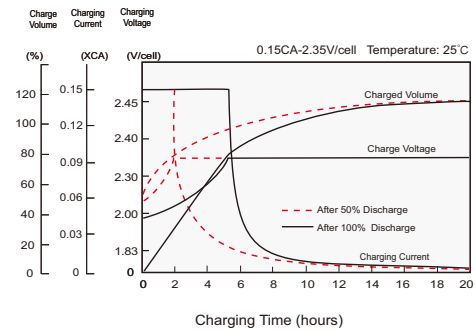

Effects of Temperature on Capacity

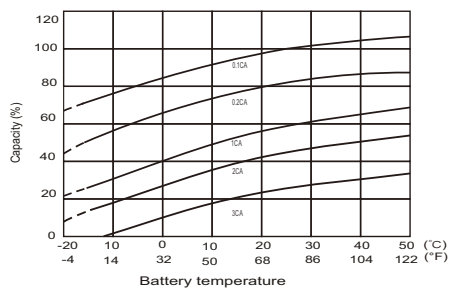

Self Discharge Characteristics

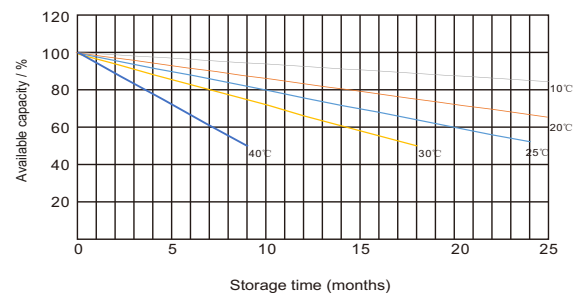

Leoch International Technology Ltd.
www.leoch.com

Leoch Batteries Pte Ltd
www.leoch.sg

Leoch Battery Corporation
www.leochamericas.com

Leoch Europe S.A.
www.leoch.eu

Data above is recommended and the picture is only for battery effect display, Leoch reserve the final right of explanation.
 © LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice. E&OE.

Publication No.:LB-PLX12-260FT(A)-PD-EN-V2.0-20240108